



Artikelnummer RST Article Code RST	Hersteller- nummer Manufacturer Code RST	Größe Size	Gewinde Entry Thread	KB Kabelmantel aussen/Clamping R. Outer Sheath (mm)		KB Kabelmantel innen/Clamping R. Inner Sheath (mm)		KB Armierung / Clamping Range Armour (mm)		 1/2	L (mm)	H max. (mm)	VPE* PU*
				≥	≤	≥	≤	≥	≤				
00848999V1	ADE4N1252SSN	9	NPT 1 1/4"	23.0	34.0	18.0	27.5	0.2	1.6	48/48	28.0	76.0	1

Material	Edelstahl 1.4404
Druckring	PA
Dichteinsatz	Silikon
Armierungsring	Edelstahl 1.4404
Armierungskonus	Edelstahl 1.4404
Einsatztemperatur	-60°C bis +140°C
Schutzart gem. IEC 60529	IP66/IP68 (Montageanleitung berücksichtigen)
ATEX-Kennzeichnung	Ex II 2 GD / Ex db IIC / Ex eb IIC / Ex tb IIIC Ex I M2 / Ex db I / Ex eb I
Zugentlastung gem. EN 60079-0 (Anhang A)	25 %
Empfohlenes Anzugsdrehmoment	Hutmutter 75.0 Nm Stutzen 75.0 Nm
CE-Kennzeichnung	ja (Richtlinie 2014/34/EU)
Zolltarif-Nummer	85369010
Gewicht	0.445 kg
EAN-Nummer	3589350035827
RoHS (2015/863/EU)	konform
REACH/SVHC (Art. 33 1907/2006)	keine SVHC-Stoffe enthalten
Konfliktminerale (Dodd-Frank Act)	keine Konfliktminerale enthalten

Für besondere Bedingungen oder Einschränkungen siehe entsprechende Produktdokumentation.

Material	Stainless Steel 316L
Pressure Ring	PA
Sealing	Silicone
Reinforcement Ring	Stainless Steel 316L
Reinforcement Cone	Stainless Steel 316L
Operating Temperature	-60°C to +140°C
Protection Class rel. IEC 60529	IP66/IP68 (Consider mounting instruction)
ATEX Marking	Ex II 2 GD / Ex db IIC / Ex eb IIC / Ex tb IIIC Ex I M2 / Ex db I / Ex eb I
Strain relief rel. EN 60079-0 (Appendix A)	25 %
Recommended Tightening Torque	Cap 75.0Nm Body 75.0 Nm
CE Marking	yes (Directive 2014/34/EU)
Customs Tariff Number	85369010
Weight	0.445 kg
EAN Code	3589350035827
RoHS (2015/863/EU)	compliant
REACH/SVHC (Art. 33 1907/2006)	contain no SVHC substances
Konfliktminerale (Dodd-Frank Act)	contain no conflict minerals

For specific conditions or limitations please see relevant product documentation.

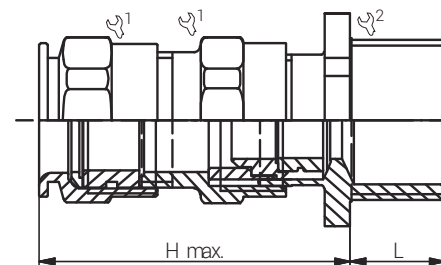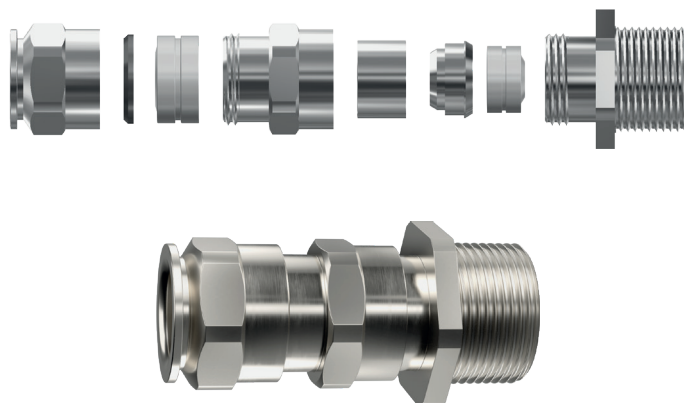

Kabelverschraubungen Ex Ex Cable Glands ADE4F / NPT

Produktdokumentation Product Documentation



* Mindestbestellmenge (MOQ) kann größer sein als Verpackungseinheit (VPE).

* Minimum order quantity (MOQ) can be larger than packaging unit (PU).

RST Rabe-System-Technik und Vertriebs-GmbH
Otto-Lilienthal-Strasse 19
49134 Wallenhorst

DEUTSCHLAND

+49 5407 8766-0

+49 5407 8766-99

info@rst.eu

www.rst.eu