



Material	Messing, vernickelt (bleifrei) CuZn42
Dichteinsatz	Chloropren
Klemmeinsatz	Polyamid 6
O-Ring	NBR
Einsatztemperatur	-40°C bis +100°C kurzzeitig bis +150°C
Schutzart // NEMA	IP66 / IP68 / IP69 // 4X / 12 / 13

Material	Nickel Plated Brass (lead free) CuZn42
Sealing	Chloroprene
Clamping Insert	Polyamide 6
O-Ring	NBR
Operating Temperature	-40°C to +100°C intermittent to +150°C
Protection Class // NEMA	IP66 / IP68 / IP69 // 4X / 12 / 13

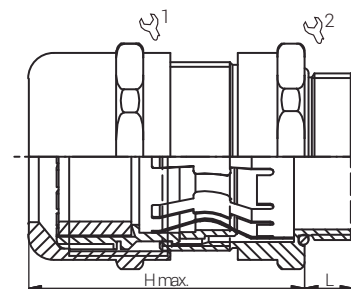

Kabelverschraubungen
EMV
EMC Cable Glands
EURO-TOP EMV 4. Gen. LF
M

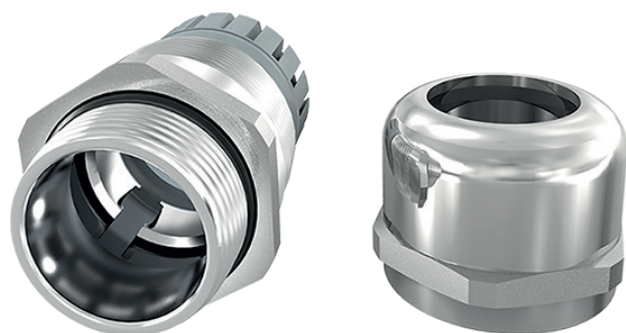


Produktdokumentation
Product Documentation




RST Rabe-System-Technik und Vertriebs-GmbH
Otto-Lilienthal-Strasse 19
49134 Wallenhorst

DEUTSCHLAND

+49 5407 8766-0
+49 5407 8766-99
info@rst.eu
www.rst.eu



Artikel Article	Gewinde Entry Thread	Klemmbereich / Clamping Range (mm)		Klemmbereich Schirm Shield Diameter (mm)			L (mm)	H max.	VPE PU	Zulassungen Approvals
		IV	≤	IV	≤					
61086512LF	M12x1.5	3.0	6.5	2.0	5.0	14/14	6.0	30.0	50	cURus / VDE
61086516LF	M16x1.5	5.0	10.0	3.5	8.0	20/20	6.0	35.0	50	cURus / VDE
61086522LF	M20x1.5	7.5	14.0	5.5	11.5	24/24	8.0	41.5	50	cULus / VDE
61086525LF	M25x1.5	10.0	18.0	7.0	14.0	30/30	8.0	44.5	25	cULus / VDE
61086532LF	M32x1.5	16.0	25.0	12.0	20.0	40/40	9.0	55.0	18	cULus / VDE
61086540LF	M40x1.5	22.0	32.0	18.0	27.0	50/50	9.0	62.5	4	cULus / VDE
61086550LF	M50x1.5	30.0	38.0	26.0	34.0	58/58	9.0	74.0	4	cULus / VDE
61086563LF	M63x1.5	34.0	44.0	30.0	40.0	64/68	14.0	60.0	4	cULus / VDE

Nützlicher Hinweis zu Kabeldurchmesser & Klemmbereich Useful Information about Cable Diameter & Clamping Range

Um die Abdichtung zwischen Kabel und Kabelverschraubung bestmöglich gewährleisten und die Belastung für beide Bauteile so gering wie möglich halten zu können, empfehlen wir die Kabelverschraubung bzw. den Klemmbereich der Kabelverschraubung so zu wählen, dass sich der Durchmesser des verwendeten Kabels im mittleren bis oberen Klemmbereich befindet.
Um diese Thematik zu verdeutlichen, werden auf den folgenden Bildern die zwei Euro-Top-Kabelverschraubungen 11080520 (6 bis 12 mm) und 11080522 (10 bis 14 mm) dargestellt, in denen jeweils ein Kabel mit einem Durchmesser von 10mm montiert ist.

To ensure the best possible seal between the cable and the cable gland and to be able to keep the stress pressure on both components as low as possible, we recommend selecting the cable gland or the clamping range of the cable gland in such a way that the diameter of the cable used is in the middle to upper clamping range.
In order to explain this topic, the two Euro-Top cable glands 11080520 (6 to 12 mm) and 11080522 (10 to 14 mm) are shown in the following pictures, in each of which a cable with a diameter of 10 mm is mounted.

