
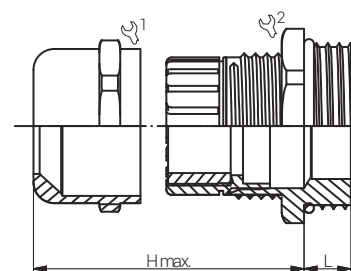
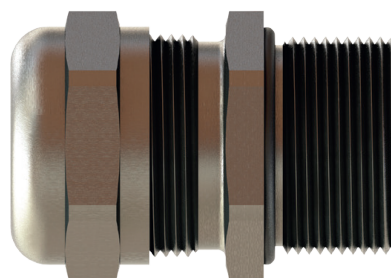


Material	Messing, vernickelt
Dichteinsatz	EPDM
Klemmeinsatz	Polyamid 6
O-Ring	EPDM
Einsatztemperatur	-40°C bis +100°C
Schutzart	IP66 / IP68 (5 Bar)

Material	Nickel Plated Brass
Sealing	EPDM
Clamping Insert	Polyamide
O-Ring	EPDM
Operating Temperature	-40°C to +100°C
Protection Class	IP66 / IP68 (5 bar)

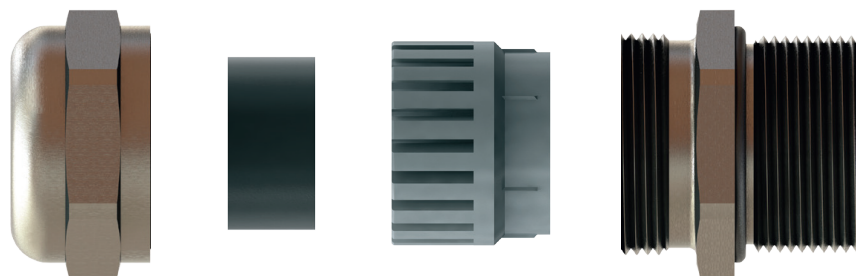

Kabelverschraubungen
Standard
Standard Cable Glands
EURO-TOP MS RAIL / M

Produktdokumentation
Product Documentation



RST Rabe-System-Technik und Vertriebs-GmbH
Otto-Lilienthal-Strasse 19
49134 Wallenhorst

DEUTSCHLAND

+49 5407 8766-0
+49 5407 8766-99
info@rst.eu
www.rst.eu

