




Artikelnummer RST Article Code RST	Hersteller- nummer Manufacturer Code RST	Größe Size	Gewinde Entry Thread	KB Kabelmantel aussen/Clamping R. Outer Sheath (mm)		KB Kabelmantel innen/Clamping R. Inner Sheath (mm)		KB Armierung / Clamping Range Armour (mm)		 1/2	L (mm)	H (mm)	VPE* PU*
				≥	≤	≥	≤	≥	≤				
77021307	E1WBF 25/075NPT	25	NPT 3/4"	20.3	27.4	13.0	20.0	1.3	1.3	38/38	16.0	58.0	1

Material: Messing, blank
Dichteinsatz: Chloropren
Armierungsring: Messing, blank
Armierungskonus: Messing, blank
Einsatztemperatur: -35°C bis +90°C
Schutzart gem. IEC 60529: IP66/IP68
(Montageanleitung berücksichtigen)
Schutzart gem. UL50E: 4X
ATEX-Kennzeichnung: Ex II 1D 2G
Ex d IIC Gb / Ex e IIC Gb / Ex ta IIIC Da
Zugentlastung gem. EN 60079-0: 25 %
CE-Kennzeichnung: ja (Richtlinie 2014/34/EU)
Zolltarif-Nummer: 85369010
RoHS (2015/863/EU): konf. (Inanspruchnahme Ausnahme 6c)
REACH/SVHC (Art. 33 1907/2006): Blei enthalten
Konfliktmineralien (Dodd-Frank Act): keine Konfliktmineralien enthalten

Für besondere Bedingungen oder Einschränkungen siehe entsprechende Produktdokumentation.

Material: Natural Brass
Sealing: Chloroprene
Reinforcement Ring: Natural Brass
Reinforcement Cone: Natural Brass
Operating Temperature: -35°C to +90°C
Protection Class rel. IEC 60529: IP66/IP68
(Consider mounting instruction)
Protection Class rel. UL50E: 4X
ATEX Marking: Ex II 1D 2G
Ex d IIC Gb / Ex e IIC Gb / Ex ta IIIC Da
Strain relief rel. EN 60079-0: 25 %
CE Marking: yes (Directive 2014/34/EU)
Customs Tariff Number: 85369010
RoHS (2015/863/EU): compliant (claim exception 6c)
REACH/SVHC (Art. 33 1907/2006): contain lead
Konfliktmineralien (Dodd-Frank Act): contain no conflict minerals

For specific conditions or limitations please see relevant product documentation.

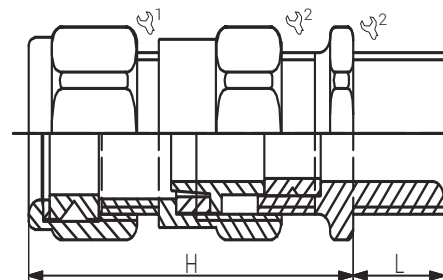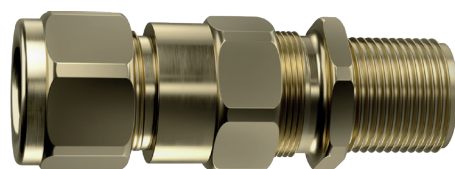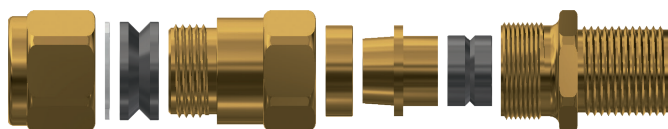

Kabelverschraubungen Ex Ex Cable Glands E1WBF / NPT

Produktdokumentation Product Documentation



* Mindestbestellmenge (MOQ) kann größer sein als Verpackungseinheit (VPE).

* Minimum order quantity (MOQ) can be larger than packaging unit (PU).

RST Rabe-System-Technik und Vertriebs-GmbH
Otto-Lilienthal-Strasse 19
49134 Wallenhorst

DEUTSCHLAND

+49 5407 8766-0

+49 5407 8766-99

info@rst.eu

www.rst.eu